


# VSA005



## Accelerometer

VIBRATION SENSOR

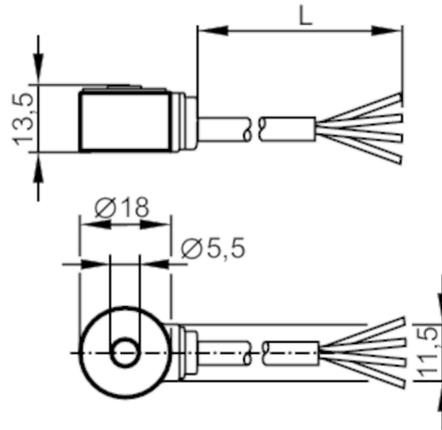

### Product characteristics

Measuring range of vibration [g]	-25...25
Frequency range [Hz]	1...10000
Measuring principle	capacitive

### Application

System	Halogen-free; screened cable; Drag chain suitability
Design	for connection to external diagnostic electronics VSE
Application	vibration detection

### Electrical data

Operating voltage [V]	7.2...10.8 DC
Current consumption [mA]	< 15
Min. insulation resistance [MΩ]	100; (500 V DC)
Protection class	III
Reverse polarity protection	yes
Type of sensor	Microelectromechanical system (MEMS)

### Outputs

Analog current output [mA]	0...10
Max. load [Ω]	300

### Measuring/setting range

Measuring range of vibration [g]	-25...25
Frequency range [Hz]	1...10000
Measuring principle	capacitive
Sensitivity [μA/g]	142
Number of measurement axes	1

### Accuracy / deviations

Linearity deviation	0,2 %
---------------------	-------

# VSA005



## Accelerometer

VIBRATION SENSOR

Operating conditions	
Ambient temperature [°C]	-20...80
Note on ambient temperature	cULus: < 80 °C
Storage temperature [°C]	-20...80
Max. relative air humidity [%]	80; (40 °C: 50 % non condensing)
Protection	IP 67
Tests / approvals	
EMC	EN 61000-6-2 EN 61000-6-3
Shock resistance	DIN EN 60068-2-27 50 g 11 ms
Vibration resistance	DIN EN 60068-2-20 20 g / 10 ... 2000 Hz
MTTF [years]	2660
Mechanical data	
Weight [g]	323.5
Type of mounting	mounting screw
Material	housing: stainless steel (1.4404 / 316L)
Tightening torque [Nm]	5
Mechanische Überlastfestigkeit [g]	500
Drag chain suitability	yes
Drag chain suitability	Bending radius for fixed installation : min. 4 x cable diameter Bending radius for flexible applications : min. 15 x cable diameter
Accessories	
Items supplied	head cap screw: 1 x (M5 x 20 mm), Torx 15
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Cable: 10 m, PUR, Halogen-free, Ø 4 mm, screened; Maximum cable length: 250 m; drain wire applied to the housing; 4 x 0.14 mm <sup>2</sup>	
blue	GND
black	test
brown	L+
white	Out
screen	drain wire