




## AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

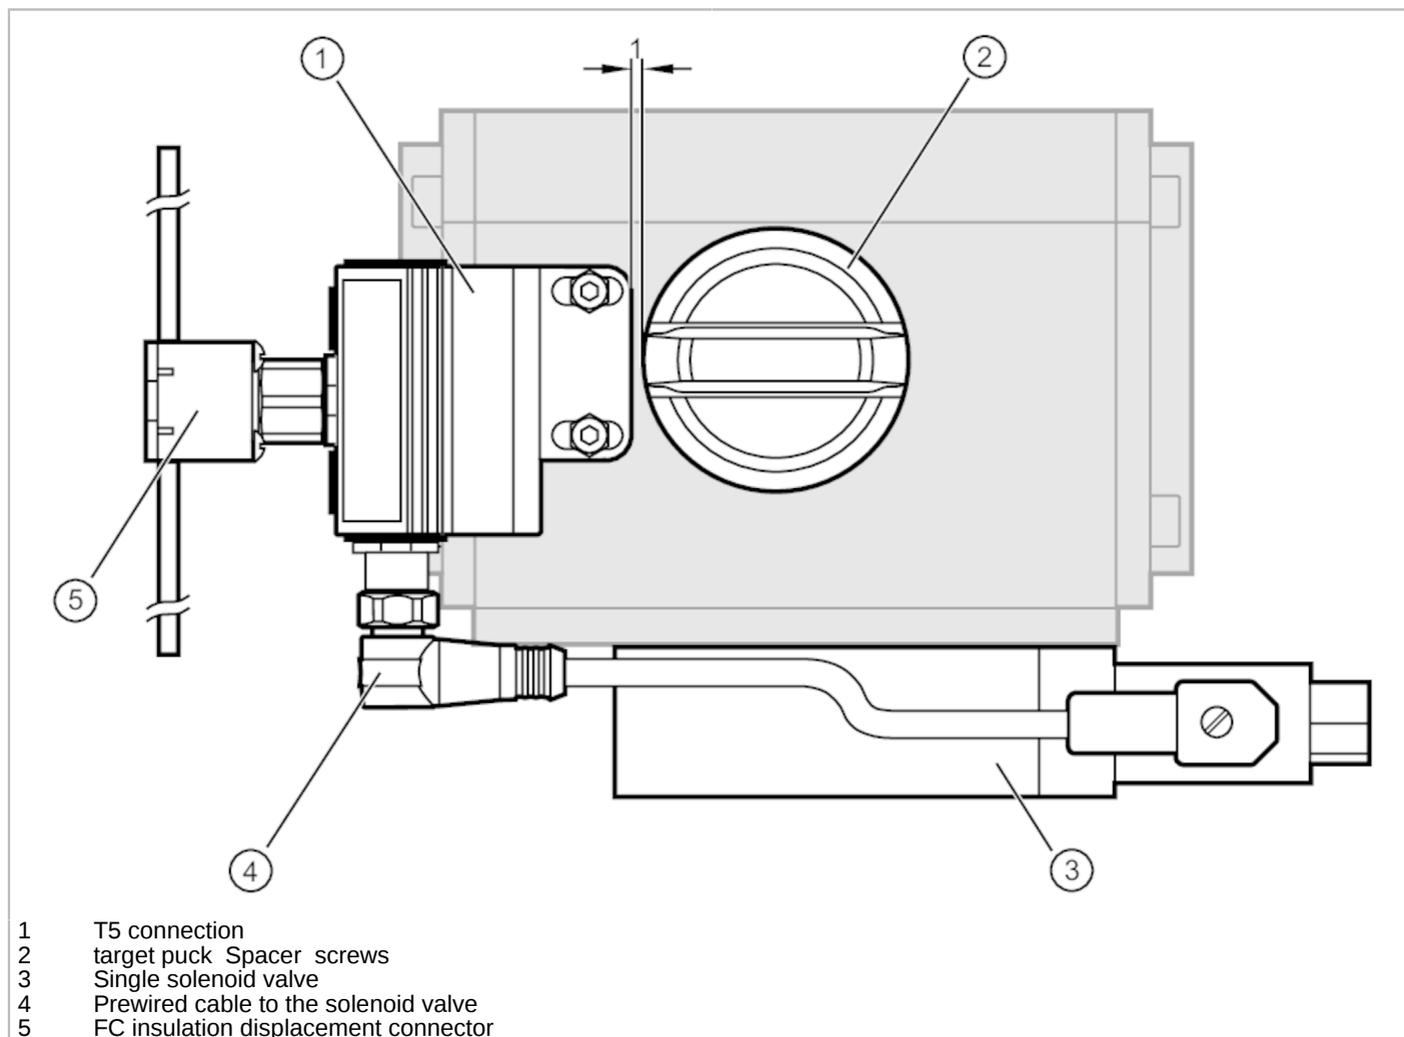

### Product characteristics

Output function	PNP
-----------------	-----

### Application

Application	direct open and close valve control
Components	T5 connection: 1, AC2316
	target puck: 1, E12724
	Spacer: 1, E12526
	Flat cable insulation displacement connector: 1, E75471
	screw: 1, E12752
	Single solenoid valve: 1, ZJF131
	Silencer: 2
	Connection cable: 1, EVC030

### Electrical data

Max. current consumption from AS-i	[mA]	160
Operating voltage AUX DC	[V]	26.5...31.6; (cULus - Class 2 source required)

### Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
------------------------------	---

# ZZ0668




## AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

Inputs	
Number of digital inputs	2
Outputs	
Number of digital outputs	1
Output function	PNP
AS-i classification	
AS-i version	2.1
AS-i profile	S-7.A.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	A.E
Mechanical data	
Weight [g]	784.5
Mounting	non-flush mountable
Hole spacing [mm]	80
Shaft height of actuator stem [mm]	20
Remarks	
Pack quantity	1 pcs.

### Electrical connection

#### Electrical connection - Socket



#### Outputs

3	External voltage -
4	Switching output 1 +

#### Electrical connection - plug




# ZZ0668



## AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

### Connection

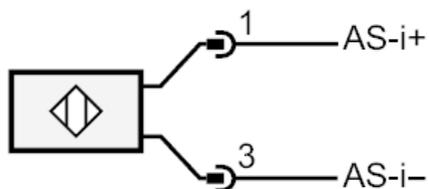

### Connection

1	AS-i +
3	AS-i -