


TWO POINTS/THREE POINTS INTERNAL MICROMETERS

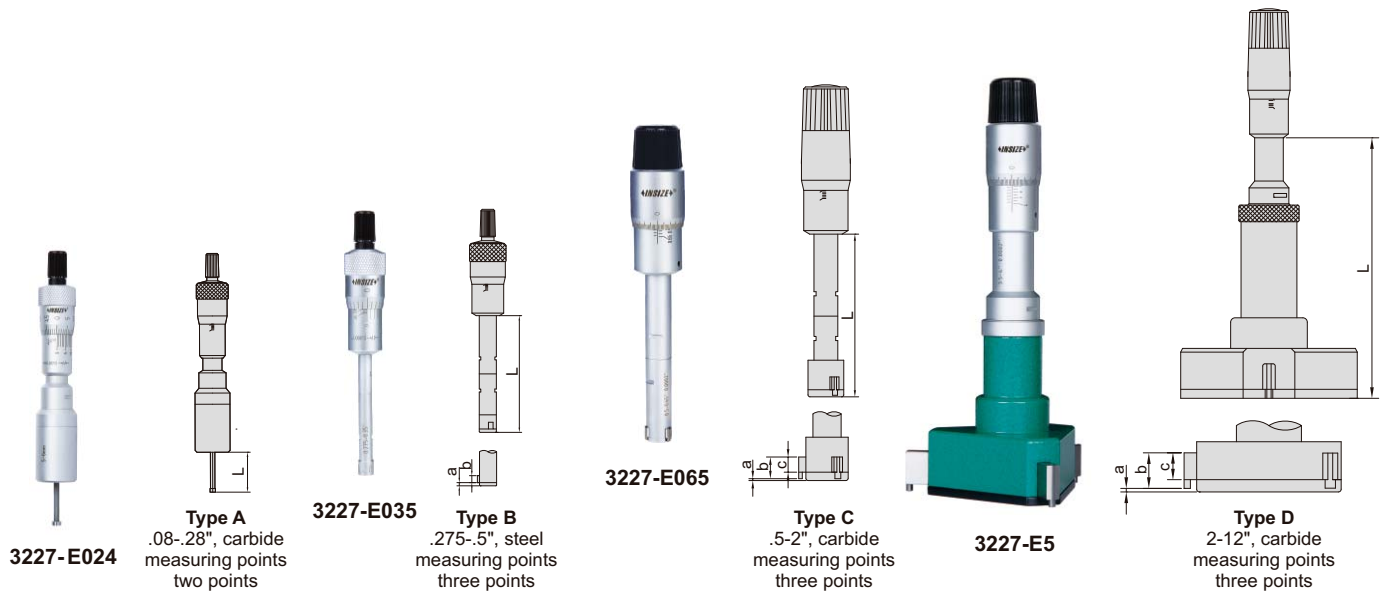

- .08-.5": graduation .0001"
- .5-12": graduation .0002"
- Ratchet stop
- Optional accessory: setting rings (part no. **6312**),
micrometer stand and clamp (part no. **6301** and **6301-2**)

Individual

Part No.	Range	Type	Accuracy	Setting ring	Extension rod (included)	L	a	b	c
3227-E01*	.08-.1"	A (two points)	.00025"	.1" DIA (included)	—	0.472"	—	—	—
3227-E012*	.1-.12"	A (two points)	.00025"	.1" DIA (included)	—	0.472"	—	—	—
3227-E016*	.12-.16"	A (two points)	.00025"	.16" DIA (included)	—	0.866"	—	—	—
3227-E02*	.16-.2"	A (two points)	.00025"	.16" DIA (included)	—	0.866"	—	—	—
3227-E024*	.2-.24"	A (two points)	.00025"	.24" DIA (included)	—	0.866"	—	—	—
3227-E028*	.24-.28"	A (two points)	.00025"	.24" DIA (included)	—	0.866"	—	—	—
3227-E035*	.275-.35"	B (three points)	.00015"	.275" DIA (included)	4"	2.146"	.059"	.098"	—
3227-E0425*	.35-.425"	B (three points)	.00015"	.35" DIA (included)	4"	2.146"	.059"	.098"	—
3227-E05*	.425-.5"	B (three points)	.00015"	.5" DIA (included)	4"	2.146"	.059"	.098"	—
3227-E065*	.5-.65"	C (three points)	.00015"	.65" DIA (included)	6"	3.150"	.020"	.236"	.177"
3227-E08*	.65-.8"	C (three points)	.00015"	.65" DIA (included)	6"	3.150"	.020"	.236"	.177"
3227-E1*	.8-1"	C (three points)	.00015"	1" DIA (included)	6"	3.543"	.020"	.315"	.236"
3227-E112*	1-1.2"	C (three points)	.00015"	1" DIA (included)	6"	3.543"	.020"	.315"	.236"
3227-E16*	1.2-1.6"	C (three points)	.00015"	1.6" DIA (included)	6"	3.819"	.020"	.551"	.472"
3227-E2*	1.6-2"	C (three points)	.00020"	1.6" DIA (included)	6"	3.819"	.020"	.551"	.472"
3227-E25*	2-2.5"	D (three points)	.00020"	2.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3227-E3*	2.5-3"	D (three points)	.00020"	2.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3227-E35*	3-3.5"	D (three points)	.00020"	3.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3227-E4*	3.5-4"	D (three points)	.00020"	3.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3227-E5*	4-5"	D (three points)	.00025"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E6*	5-6"	D (three points)	.00025"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E7*	6-7"	D (three points)	.00030"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E8*	7-8"	D (three points)	.00030"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E9	8-9"	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E10	9-10"	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E11	10-11"	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E12	11-12"	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"

micrometer stand
with clamp (**optional**)



setting ring



.08-4": included
4-12": **optional**

extension rod



included



3227-E24

Set

Part No.	Range	Micrometers included	Setting ring (included)	Extension rod (included)
3227-E0122 *	.08-.12"	.08-.1", .1-.12"	.1" DIA	—
3227-E0282 *	.12-.28"	.12-.16", .16-.2", .2-.24", .24-.28"	.16" DIA, .24" DIA	—
3227-E053 *	.275-.5"	.275-.35", .35-.425", .425-.5"	.275" DIA, .35" DIA, .5" DIA	4"
3227-E082 *	.5-.8"	.5-.65", .65-.8"	.65" DIA	6"
3227-E24 *	.8-2"	.8-1", 1-1.2", 1.2-1.6", 1.6-2"	1" DIA, 1.6" DIA	6"
3227-E44 *	2-4"	2-2.5", 2.5-3", 3-3.5", 3.5-4"	2.5" DIA, 3.5" DIA	6"

* Supplied with manufacturer inspection certificate