
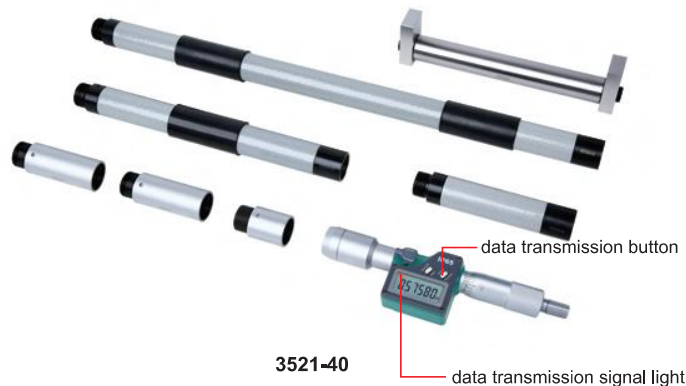


DIGITAL TUBULAR INSIDE MICROMETERS

IP65
WATERPROOF

DATA
OUTPUT

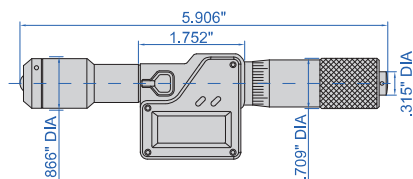

- Resolution .00005"/0.001mm
- Accuracy: $[(.00005(3+n+L/2))"]$, n=number of rods, L=maximum measuring length (inch)
 $(3+n+L/50)\mu\text{m}$, n=number of rods, L=maximum measuring length (metric)
- Carbide measuring faces
- IP65 dust/waterproof
- Button function: on/off, set, inch/mm, data transmit
- Data output
- Automatic power off
- Supplied with setting standards
- Power:
 - with data interface: CR2032
 - built-in wireless: rechargeable lithium battery

With data interface (data output cable part no. 7315-31 and receiver is required page 4, 7302-31 page 12, optional)

Part No.	Range	Micrometer head	Travel of micrometer head	Diameter of extension rods	Extension rods
3521-7	6-7"/150-175mm	6-7"	1"	.866"	—
3521-40	6-40"/150-1000mm	6-7"	1"	.866"	1", 2" (2 pcs), 4", 8", 16"
3521-60	6-60"/150-1500mm	6-7"	1"	.866"	1", 2" (2 pcs), 4" (2 pcs), 8", 16" (2 pcs)
3521-80	6-80"/150-2000mm	6-7"	1"	.866"	1", 2" (2 pcs), 4", 8" (2 pcs), 16" (3 pcs)

Built-in wireless (receiver part no. 7315-2/3/6/7/8/9 is required)

Part No.

3521-□□□□WL

Part no. examples:

Original part no.	Wireless part no.
3521-7	3521-7WL
3521-40	3521-40WL