


MICROMETER SETTING STANDARDS



6311-12

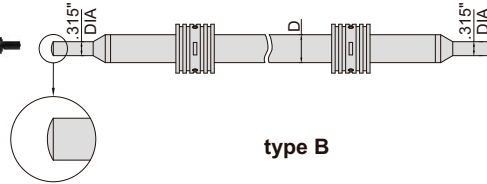

type B



6311-4

Part No.	Length	Type	Accuracy	D (DIA)
6311-1	1"	A	±.00006"	.276"
6311-2	2"	A	±.00008"	.276"
6311-3	3"	A	±.00010"	.276"
6311-4	4"	A	±.00012"	.315"
6311-5	5"	A	±.00014"	.315"
6311-6	6"	A	±.00016"	.315"
6311-7	7"	A	±.00018"	.315"
6311-8	8"	A	±.00020"	.315"
6311-9	9"	A	±.00022"	.315"
6311-10	10"	A	±.00024"	.315"
6311-11	11"	A	±.00026"	.315"
6311-12	12"	B	±.00028"	.630"
6311-13	13"	B	±.00030"	.630"
6311-14	14"	B	±.00031"	.630"
6311-15	15"	B	±.00033"	.630"

Part No.	Length	Type	Accuracy	D (DIA)
6311-16	16"	B	±.00035"	.630"
6311-17	17"	B	±.00037"	.630"
6311-18	18"	B	±.00039"	.630"
6311-19	19"	B	±.00041"	.630"
6311-20	20"	B	±.00043"	.630"
6311-21	21"	B	±.00045"	.630"
6311-23	23"	B	±.00049"	.630"
6311-25	25"	B	±.00053"	.630"
6311-27	27"	B	±.00057"	.630"
6311-29	29"	B	±.00061"	.630"
6311-31	31"	B	±.00065"	.630"
6311-33	33"	B	±.00069"	.630"
6311-35	35"	B	±.00073"	.630"
6311-37	37"	B	±.00077"	.630"
6311-39	39"	B	±.00081"	.630"



type A

- Suitable for mechanical micrometers