

# PRODUCT ID: 50257

## Outdoor Blank-out LED Direct-view Sign

### MODEL

TCL2534GGRGGRGGRGGR-M763/120-27



### DIMENSIONS

25" H x 34" W x 2.5" D (est. 18.784 lbs)

### CLASS

CLASS: TCL Series

Control Method: Switch (not included) or external relay.

### CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Duranodic Bronze

Mounting Channel: None

### ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

Photodimming: None

UL/cUL Listed: Listed for wet locations


### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.


Sign Messages: See message table below

# Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

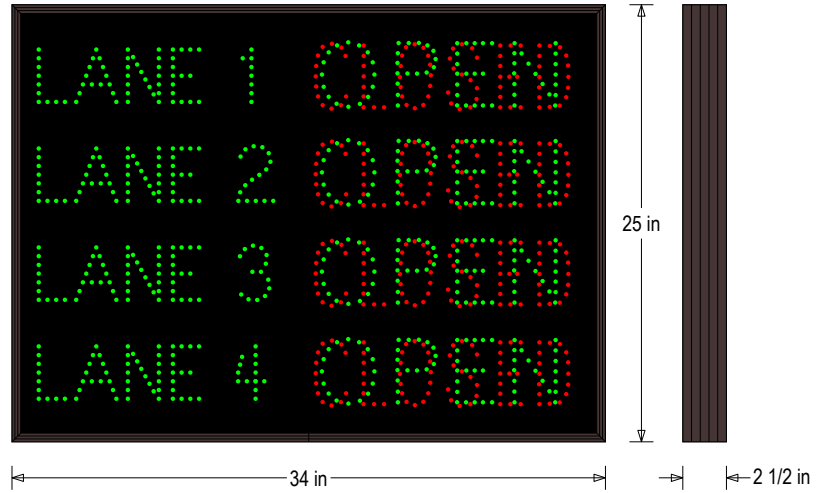

### Sample Display Options

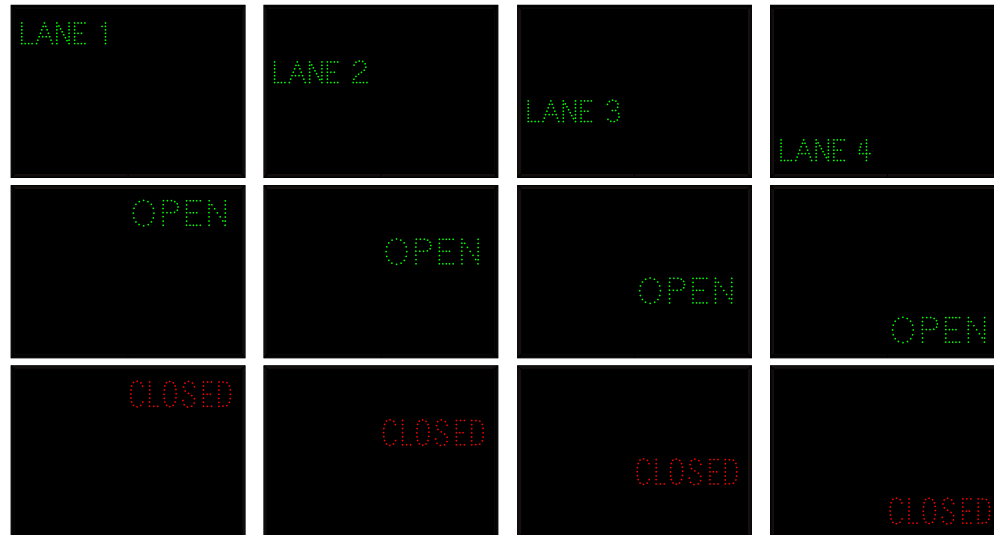

Frame Detail



MESSAGE	LED/COLOR	HEIGHT	AMPS
LANE 1	Green Wide Angle LED	3.0"	0.055-0.024
OPEN	Green Wide Angle LED	3.5"	0.055-0.024
CLOSED	Red Wide Angle LED	3.5"	0.041-0.018
LANE 2	Green Wide Angle LED	3.0"	0.063-0.027
OPEN	Green Wide Angle LED	3.5"	0.055-0.024
CLOSED	Red Wide Angle LED	3.5"	0.041-0.018
LANE 3	Green Wide Angle LED	3.0"	0.060-0.026
OPEN	Green Wide Angle LED	3.5"	0.055-0.024
CLOSED	Red Wide Angle LED	3.5"	0.041-0.018
LANE 4	Green Wide Angle LED	3.0"	0.060-0.026
OPEN	Green Wide Angle LED	3.5"	0.055-0.024
CLOSED	Red Wide Angle LED	3.5"	0.041-0.018

NOTE: Above messages are independently controlled.