

PRODUCT ID: 64715

Space Available Sign

MODEL

S-SA2789GRW-Q704/120-277VAC



DIMENSIONS

27" H x 89" W x 5.5" D (est. 113.168 lbs)

CLASS

Class: SA Series Smart Sign

Control Method: RedStorm Sign Control and Reporting Software Communications (by others): PC or Windows server, Ethernet connection and static lease required

CONSTRUCTION

Back Construction: 0.125" Aluminum sheet

Cabinet: Corrosion resistant, extruded aluminum frame with a hinged face. 5.5" deep, mitered construction. LED displays are attached using sign-in-sign construction. Moisture absorbent interior coating.

Face Material: 1/8" thick routed aluminum panel.

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Number of Displays: (4)

ELECTRICAL

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Refer to message table (Printed Blue TBD, Blue, Black)

Display Type: ((44320) 4-Digit Seven Segment w/ FULL, (64713) 2-Digit Seven Segment)

Font: Swiss 721 Bold BT


Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029

NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

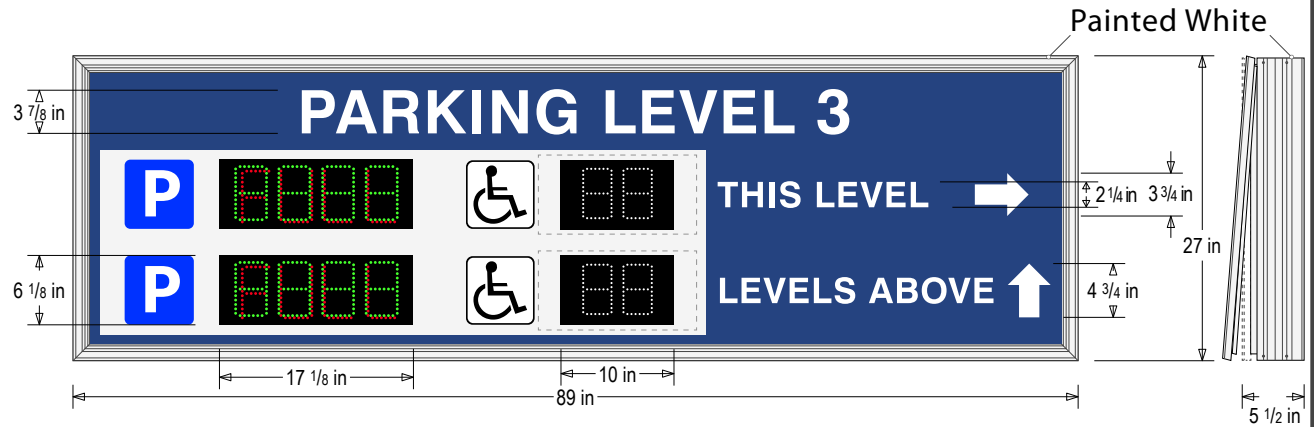

44320, Smart
Seven Segment
Display Functions

OPEN

CLSD

394

FULL

FULL

64713, Smart
Seven Segment
Display Functions

39

75

Frame Detail

