

PRODUCT ID: 64716

Space Available Sign

MODEL

S-SA4673GRW-Q704/120-277VAC



DIMENSIONS

46" H x 73" W x 5.5" D (est. 167.78 lbs)

CLASS

Class: SA Series Smart Sign

Control Method: RedStorm Sign Control and Reporting Software Communications (by others): PC or Windows server, Ethernet connection and static lease required

CONSTRUCTION

Back Construction: 0.125" Aluminum sheet
 Cabinet: Corrosion resistant, extruded aluminum frame with a hinged face. 5.5" deep, mitered construction. LED displays are attached using sign-in-sign construction. Moisture absorbent interior coating.
 Face Material: 1/8" thick routed aluminum panel.
 Faces: Single Faced Sign
 Finish: Duranodic Bronze
 Graphic: Printed graphic applied to surface
 Number of Displays: (10)

ELECTRICAL

Input Voltage: 120-277 VAC
 UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Refer to message table (Printed Blue TBD, Blue, Black)
 Display Type: ((44320) 4-Digit Seven Segment w/ FULL, (64713) 2-Digit Seven Segment)
 Font: Swiss 721 Bold BT


Sign Messages. See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029

NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

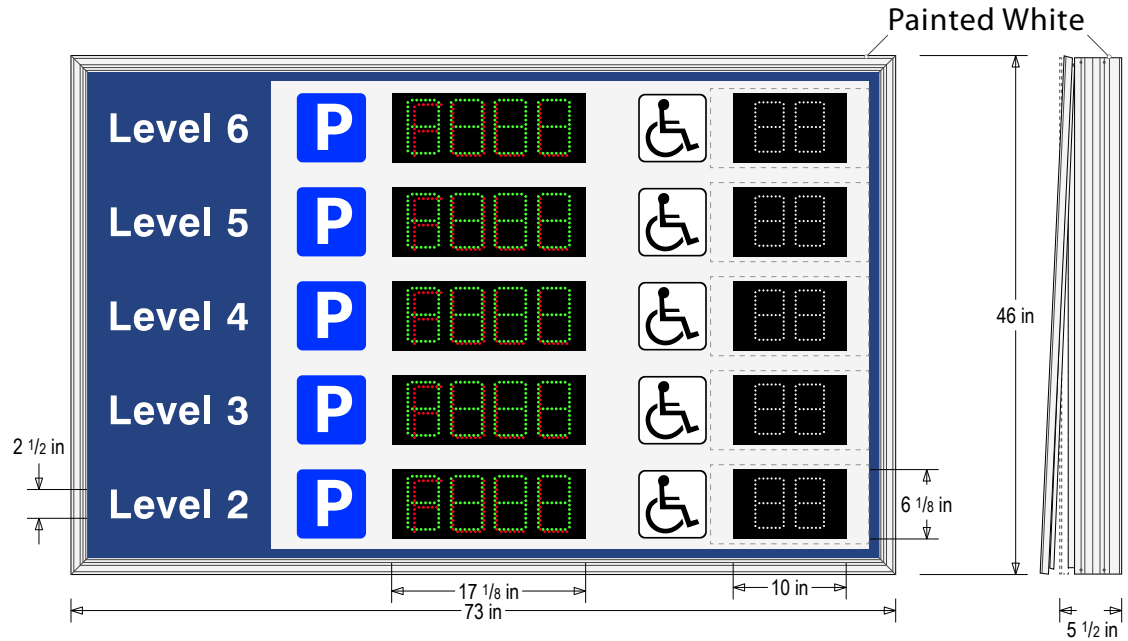

44320, Smart
 Seven Segment
 Display Functions



FULL



64713, Smart
 Seven Segment
 Display Functions



Frame Detail

