

PRODUCT ID: 67635

Space Available Sign

MODEL
SA1286BA-02-S562/120-277VAC



DIMENSIONS
12" H x 86" W x 5.5" D (est. 63.769 lbs)

CLASS
Class: SA Series
Control Method: Communication interface with a parking system, compatible with most major equipment providers.

CONSTRUCTION
Back Construction: 0.125" Aluminum sheet
Cabinet: Corrosion resistant, extruded aluminum frame with a hinged flush face. 5.5" deep, mitered construction. LED displays are attached using sign-in-sign construction. Moisture absorbent interior coating.
Face Material: 1/8" thick routed aluminum panel.
Faces: Single Faced Sign
Finish: Black
Graphic: Printed graphic and vinyl applied to surface
Number of Displays: (2)

ELECTRICAL
Input Voltage: 120-277 VAC
UL/cUL Listed: Listed for wet locations


MESSAGE
Color: Refer to message table (Printed R0, G50, B255 Blue, Printed R255, G191, B0 Yellow, White Reflective Vinyl)
Display Type: (67608, 67609)
Font: Swiss 721 Bold BT
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Spaces Available Up Arrow ADA Symbol Up Arrow	White Reflective Vinyl, Printed R0, G50, B255 Blue, Printed R255, G191, B0 Yellow	3.5", 5.0", 6.125"	0.000-0.000
2-digit Seven Segment	Blue Wide Angle LED	4.5"	0.067-0.029
3-digit Seven Segment	Amber Wide Angle LED	4.5"	0.063-0.027

NOTE: Above messages are independently controlled.

Product View


NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

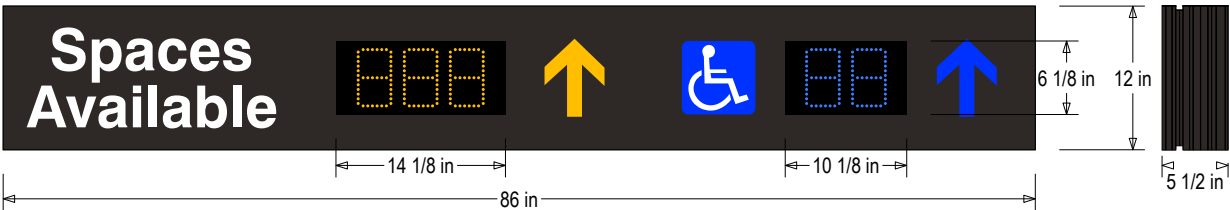

Sample Display Options



Frame Detail



Color Key

